

Gully units SELECTA 500 and MAXI C250 - Implementation



The SELECTA 500 and SELECTA MAXI gully units are compatible with standardized kerbs of type T2, T3, T4, T5, A1 and A2 like with the gutters CS2, CS3 and CS4.


Bedding recommendations:

- It's advised to realize a formwork with interior dimensions of the concrete manhole or gully pot.
- Lay a coat of sealing product (thickness min. about 30 mm).
- Lay the frame on the sealing product and regulate its level (the SELECTA MAXI gully units enable to regulate the grating and the flagstone separately).
- Finish the bedding by recovering completely the flange until the desired height (to take account of a possible coated type surfacing or other).



Important recommendations:

- To clean the interior part of the frame (support zones of the grating and the flagstone) and in particular the zones in contact with the spring bars.
- To lay the grating and the flagstone on the frame without detent. To wait the complete setting of the sealing product before to lock them in the frame.



Example of installation with a SELECTA MAXI T-profile

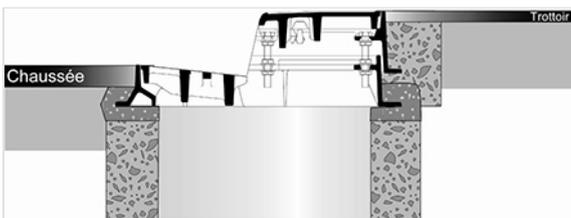


Example of installation with a SELECTA 500 T-profile and A-profile

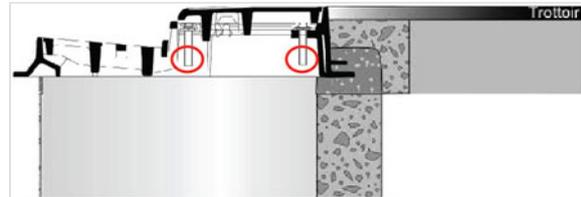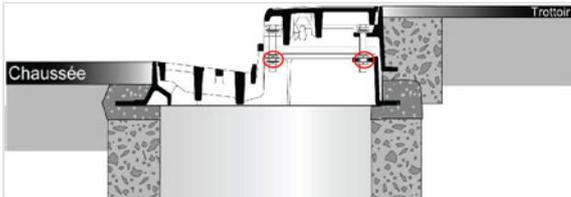


Example of installation with a SELECTA 500 T-profile and odour-tight inlets PAG n°2

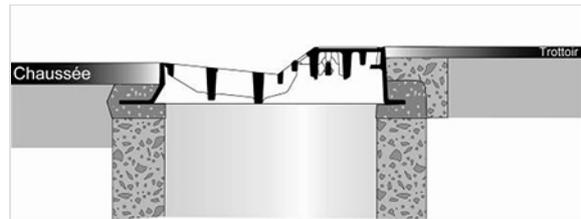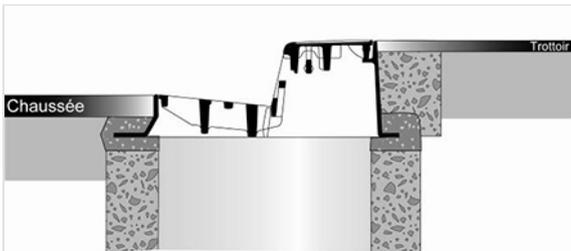

Example of installation with a SELECTA 500 T-profile and mudpan

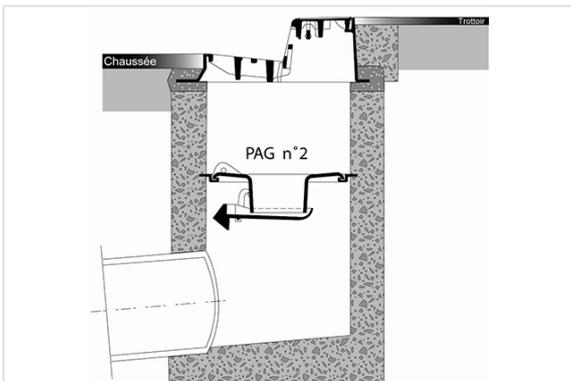

Compatible MUDPAN = **reference E4**

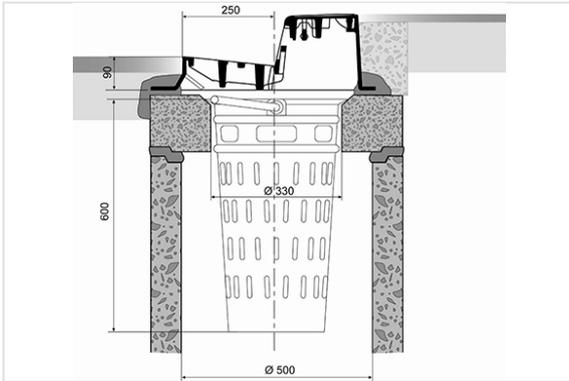

Linked products



Mudpan for Gratings
SQUADRA and DEDRA 400

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.